



GH 4 EX 2005

Load cell junction box
made of stainless steel

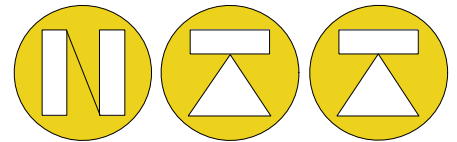


NORDIC TRANSDUCER

© Nordic Transducer

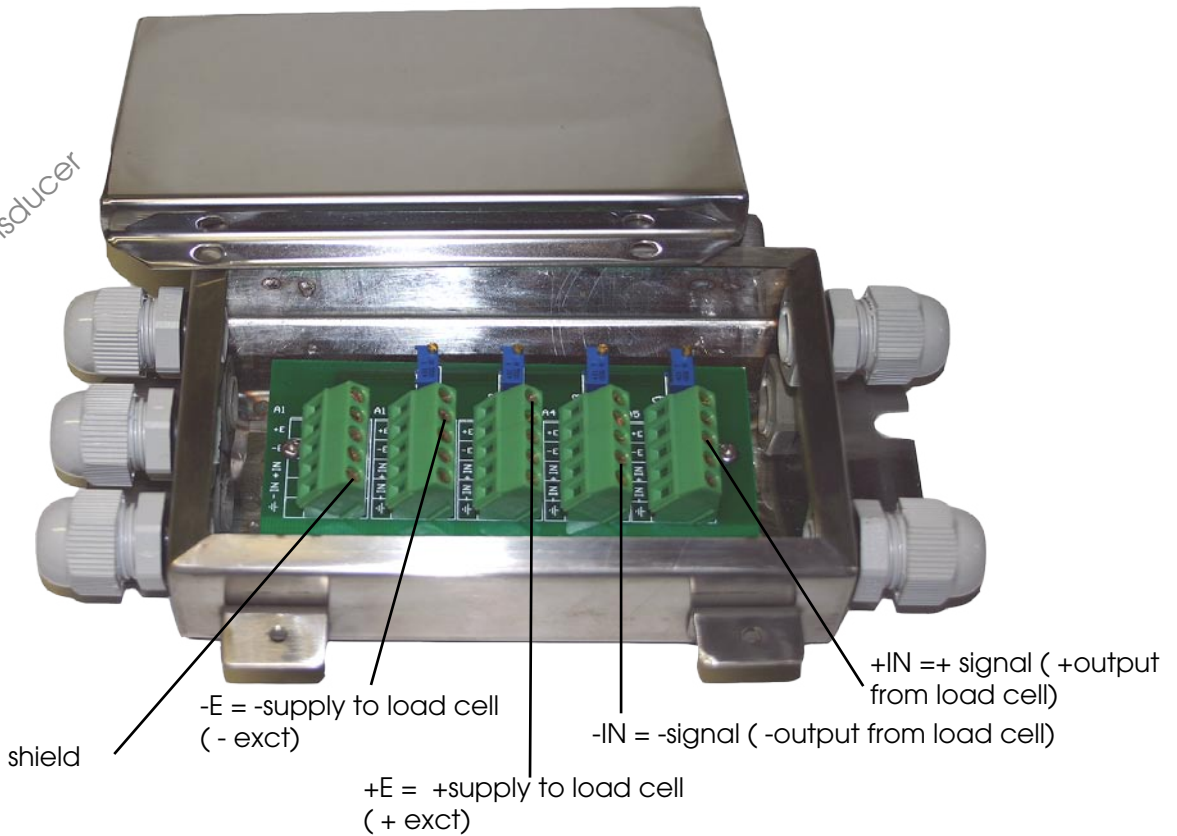


Before connection of the 4 load cell cables, then the 4 trim potentiometers must be adjusted so that they are shown the same resistance at measuring between +E at load cell terminal and common +E terminal connector.

If minor corner faults are present, then these can be balanced via the 4 potentiometers.

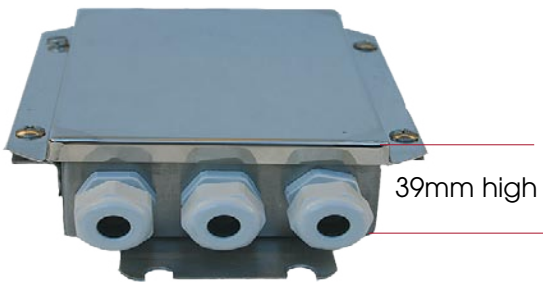

39mm high

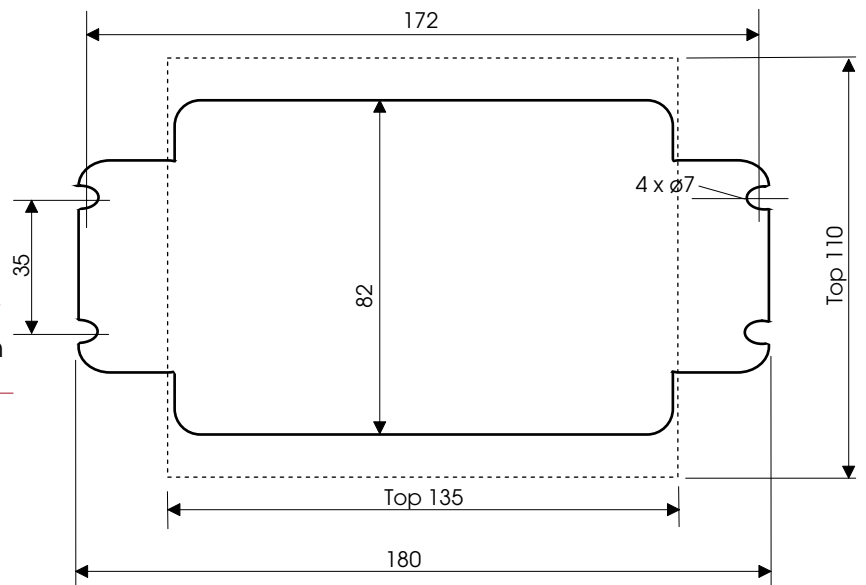

Nordic Transducer Als Odde DK9560 Hadsund Denmark

+45 98581444

+45 98581866

ntt@ntt.dk Web: www.ntt.dk